


MIN-18NW12S

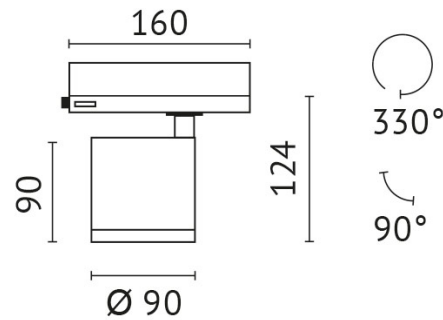

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2381 lm

colour temperature: 4000 K

colour rendering index: >90

beam angle: 15 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 139 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18SW11-60

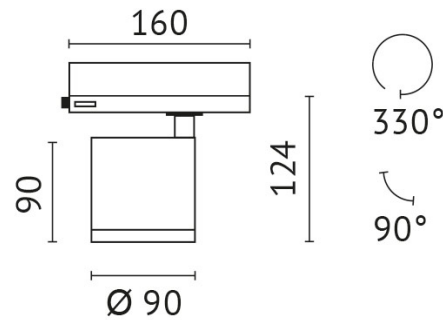

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2261 lm

colour temperature: 2700 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 132 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18SW11F

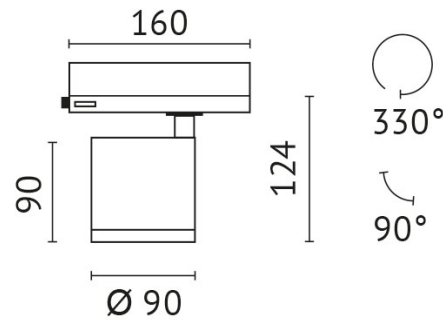

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2296 lm

colour temperature: 2700 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 134 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18SW11S

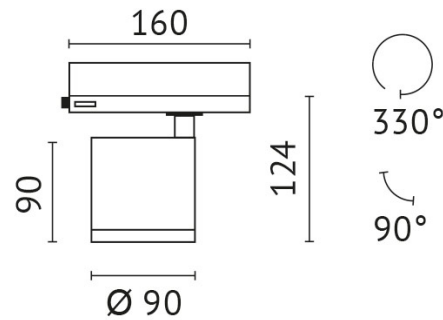

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2287 lm

colour temperature: 2700 K

colour rendering index: >90

beam angle: 15°

pivotable: 90°

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 134 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18SW12-60

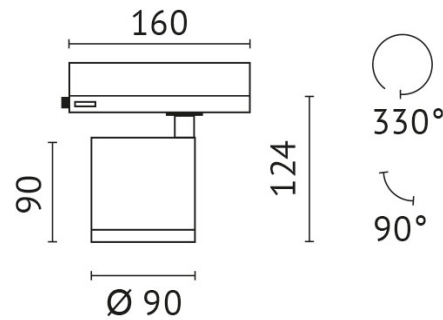

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2261 lm

colour temperature: 2700 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 132 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18SW12F

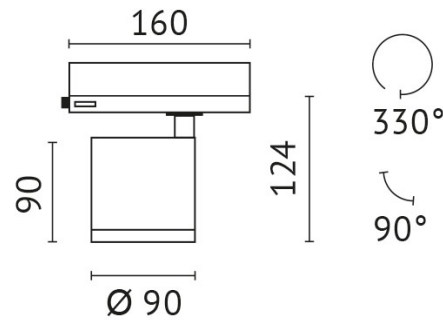

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2296 lm

colour temperature: 2700 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 134 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18SW12S

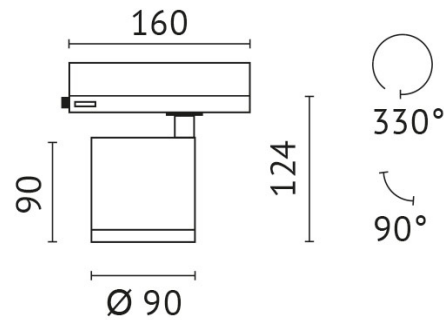

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2287 lm

colour temperature: 2700 K

colour rendering index: >90

beam angle: 15 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 134 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18WNW11-60

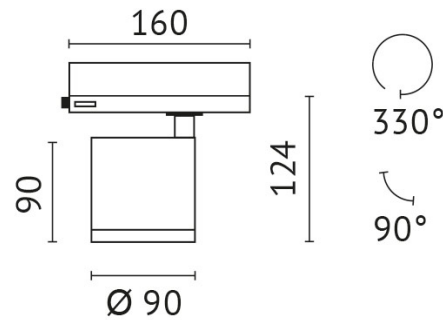

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2366 lm

colour temperature: 3500 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 138 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18WNW11F

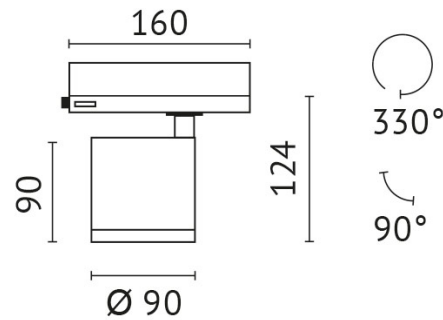

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2366 lm

colour temperature: 3500 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 138 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18WNW11S

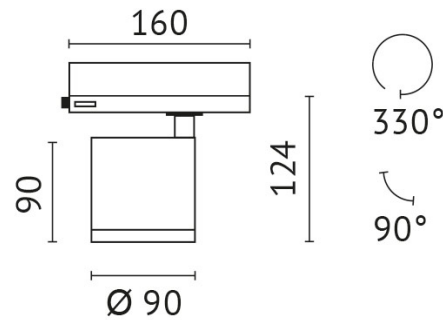

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2357 lm

colour temperature: 3500 K

colour rendering index: >90

beam angle: 15°

pivotable: 90°

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 138 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18WNW12-60

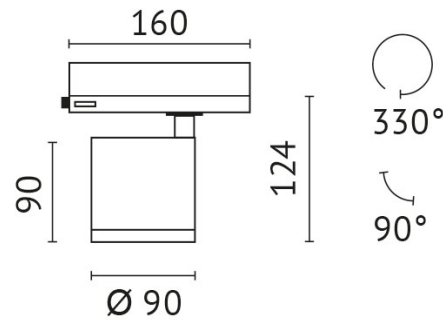

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2357 lm

colour temperature: 3500 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 138 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18WNW12F

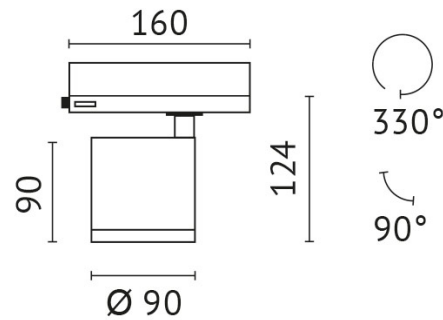

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2366 lm

colour temperature: 3500 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 138 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18WNW12S

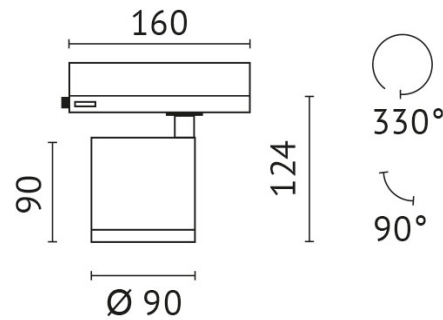

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2357 lm

colour temperature: 3500 K

colour rendering index: >90

beam angle: 15 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 138 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18WW11-60

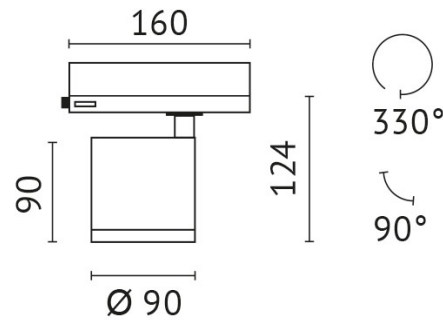

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2343 lm

colour temperature: 3000 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 137 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18WW11F

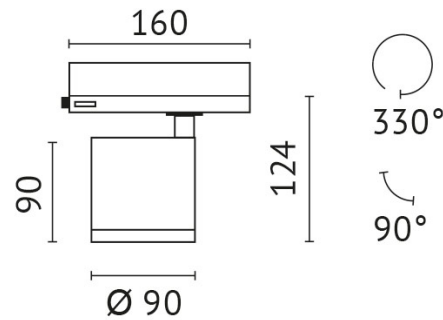

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2343 lm

colour temperature: 3000 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 137 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18WW11S

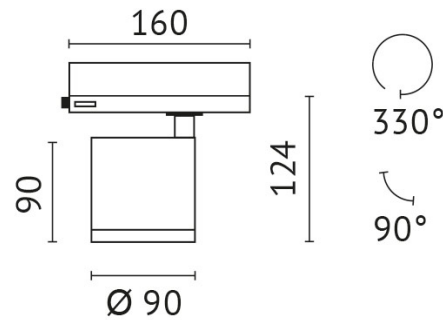

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2334 lm

colour temperature: 3000 K

colour rendering index: >90

beam angle: 15 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 136 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18WW12-60

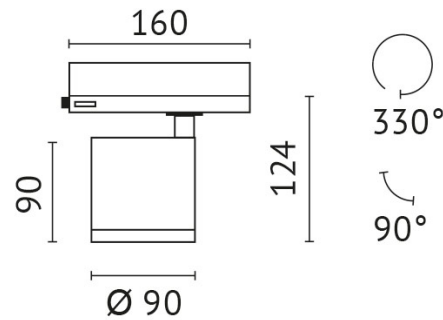

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2334 lm

colour temperature: 3000 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 136 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18WW12F

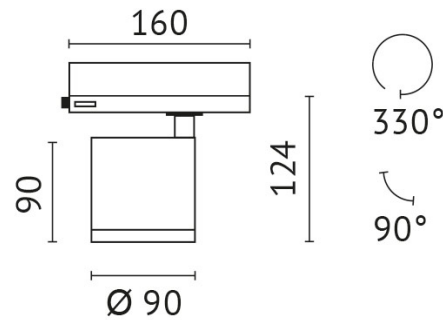

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2343 lm

colour temperature: 3000 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 137 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18WW12S

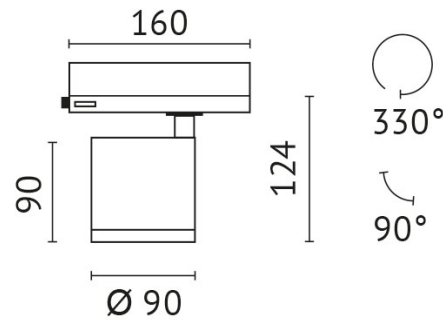

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2334 lm

colour temperature: 3000 K

colour rendering index: >90

beam angle: 15 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 136 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18NW11-60

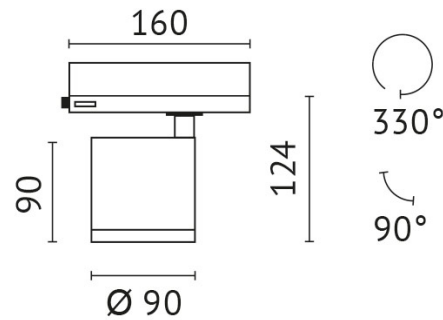

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2354 lm

colour temperature: 4000 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 138 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18NW11F

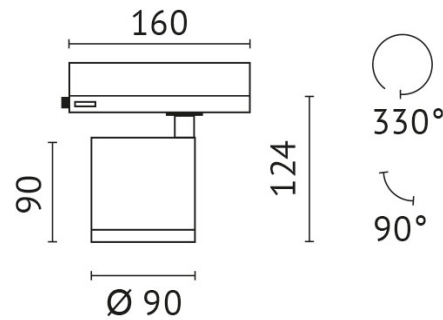

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2390 lm

colour temperature: 4000 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 140 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18NW11S

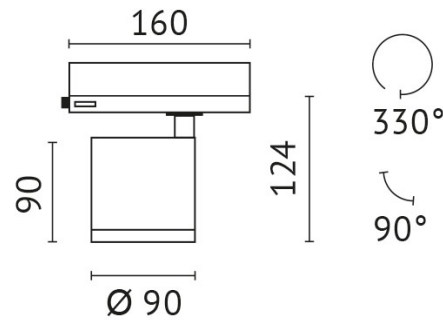

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2381 lm

colour temperature: 4000 K

colour rendering index: >90

beam angle: 15 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 139 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18NW12-60

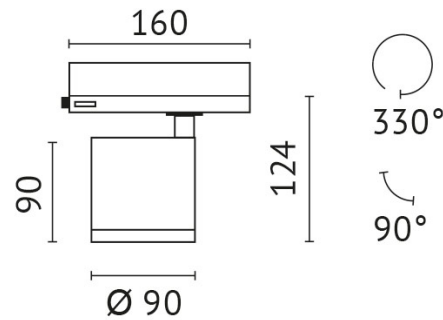

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2354 lm

colour temperature: 4000 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 138 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-18NW12F

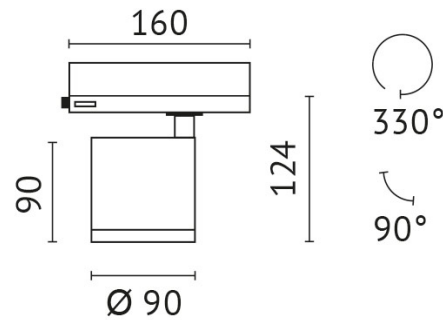

quantity lamps: 1

Light up with: COB LED

System power: 17 W

Luminous flux: 2390 lm

colour temperature: 4000 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 140 lm/W

protection class: 2

outside diameter: 95 mm

colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt