


MIN-25NW12F

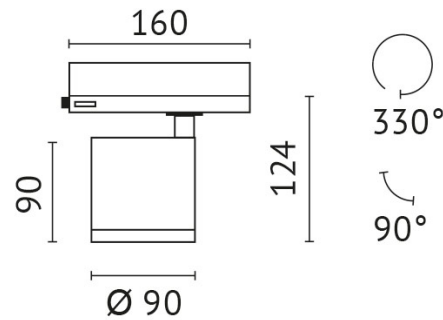

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3299 lm

colour temperature: 4000 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 131 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25NW12S

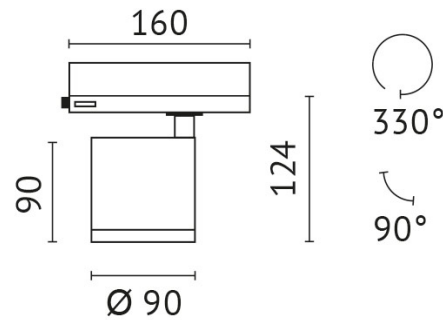

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3263 lm

colour temperature: 4000 K

colour rendering index: >90

beam angle: 15 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 129 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25SW11-60

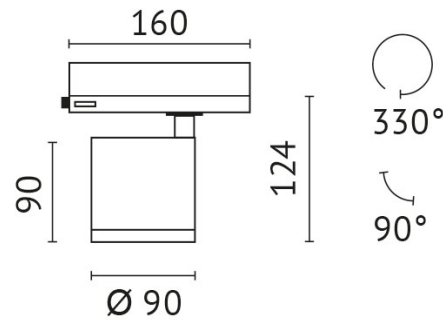

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3102 lm

colour temperature: 2700 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 123 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25SW11F

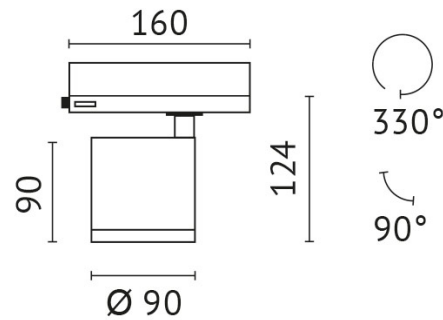

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3169 lm

colour temperature: 2700 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 126 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25SW11S

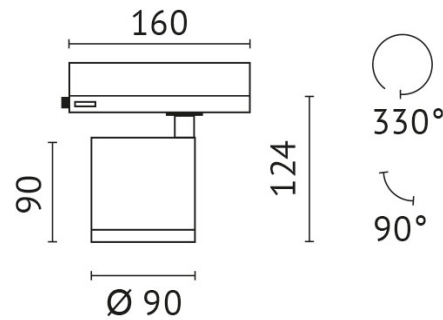

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3134 lm

colour temperature: 2700 K

colour rendering index: >90

beam angle: 15 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 124 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25SW12-60

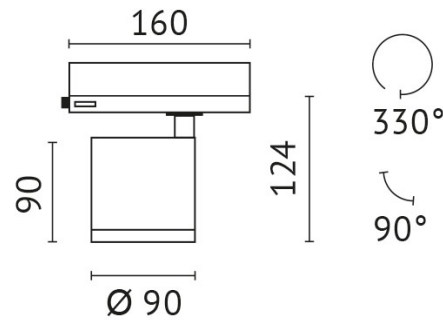

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3102 lm

colour temperature: 2700 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 123 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25SW12F

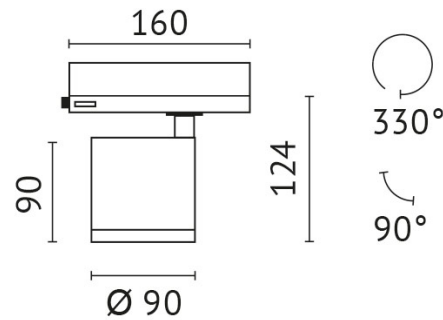

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3169 lm

colour temperature: 2700 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 126 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25SW12S

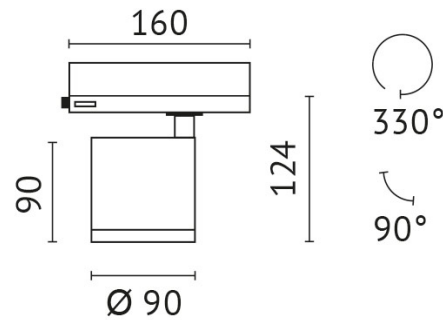

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3134 lm

colour temperature: 2700 K

colour rendering index: >90

beam angle: 15 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 124 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25WNW11-60

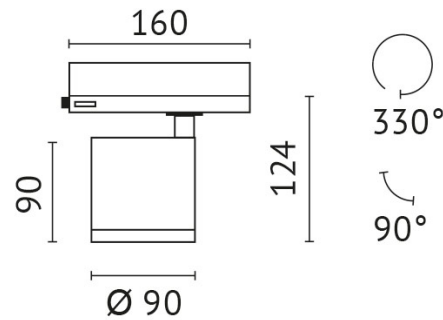

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3266 lm

colour temperature: 3500 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 130 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25WNW11F

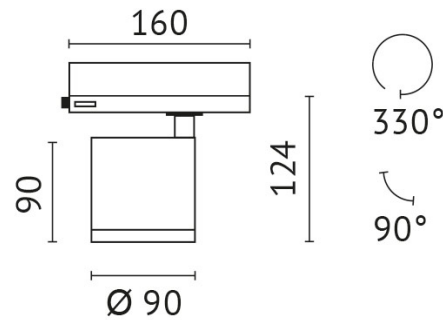

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3230 lm

colour temperature: 3500 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 128 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25WNW11S

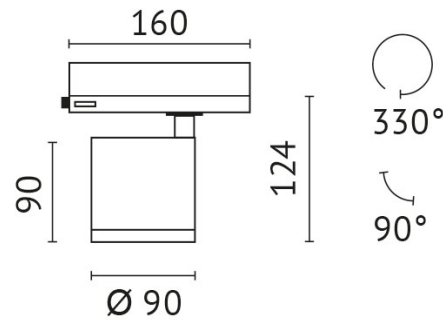

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3266 lm

colour temperature: 3500 K

colour rendering index: >90

beam angle: 15 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 130 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25WNW12-60

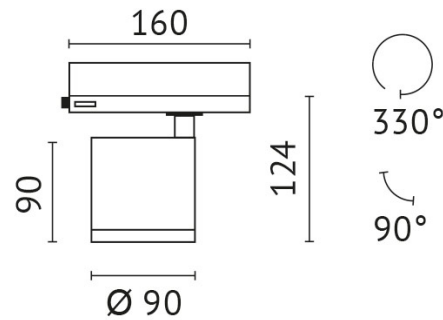

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3230 lm

colour temperature: 3500 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 128 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25WNW12F

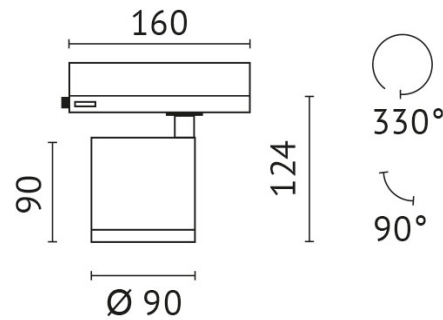

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3266 lm

colour temperature: 3500 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 130 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25WNW12S

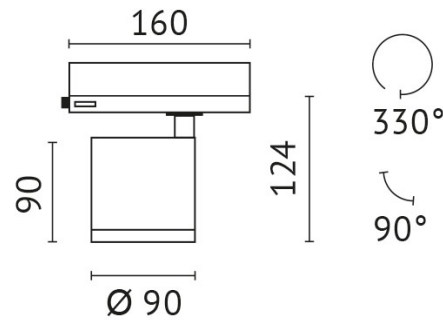

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3230 lm

colour temperature: 3500 K

colour rendering index: >90

beam angle: 15 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 128 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25WW11-60

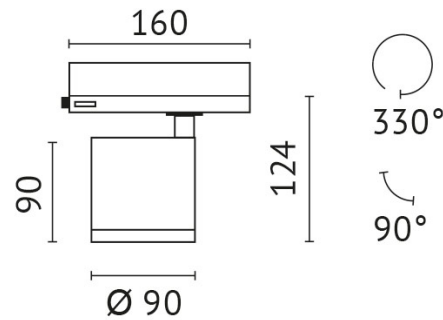

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3234 lm

colour temperature: 3000 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 128 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25WW11F

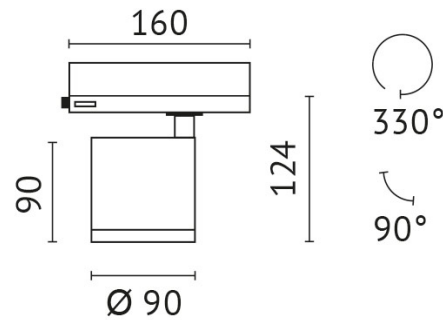

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3198 lm

colour temperature: 3000 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 127 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25WW11S

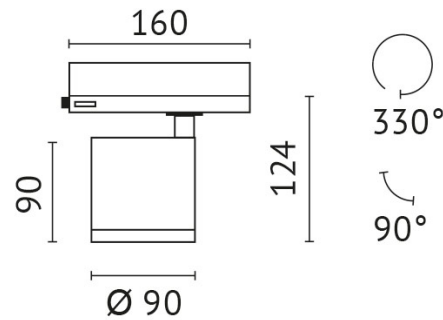

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3234 lm

colour temperature: 3000 K

colour rendering index: >90

beam angle: 15 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 128 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25WW12-60

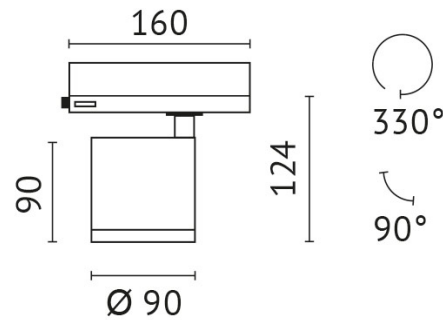

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3198 lm

colour temperature: 3000 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 127 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25WW12F

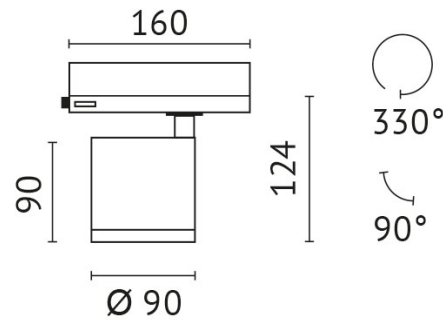

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3234 lm

colour temperature: 3000 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 128 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25WW12S

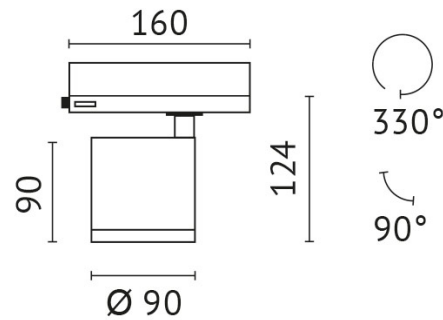

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3198 lm

colour temperature: 3000 K

colour rendering index: >90

beam angle: 15 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 127 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25NW11-60

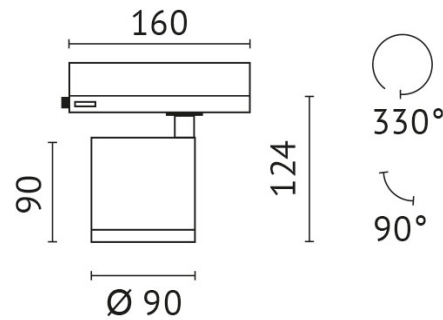

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3229 lm

colour temperature: 4000 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 128 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25NW11F

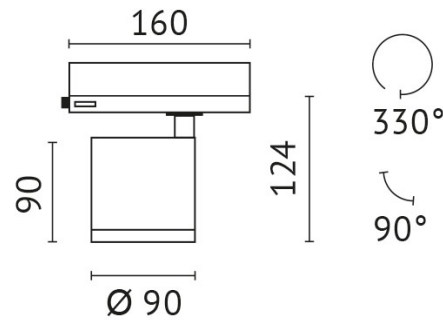

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 2299 lm

colour temperature: 4000 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 131 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25NW11S

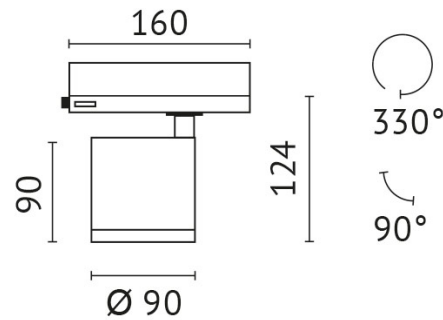

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3263 lm

colour temperature: 4000 K

colour rendering index: >90

beam angle: 15°

pivotable: 90°

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 129 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-25NW12-60

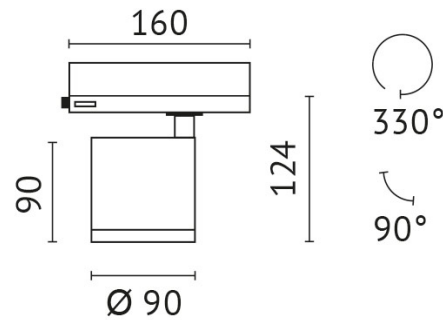

quantity lamps: 1

Light up with: COB LED

System power: 25 W

Luminous flux: 3229 lm

colour temperature: 4000 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 128 lm/W

protection class: 2

outside diameter: 95 mm

colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt