


MIN-32NW12F

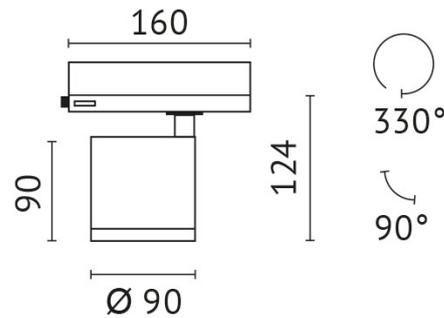

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3928 lm

colour temperature: 4000 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 124 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32NW12S

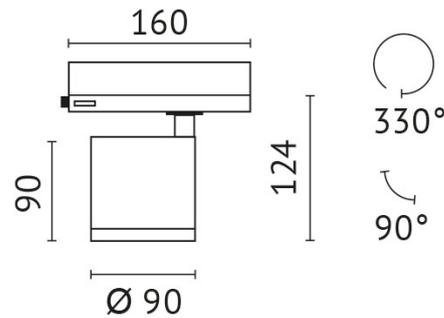

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3973 lm

colour temperature: 4000 K

colour rendering index: >90

beam angle: 15 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 126 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32SW11-60

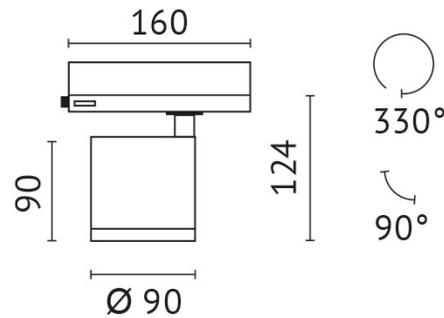

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3719 lm

colour temperature: 2700 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 118 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32SW11F

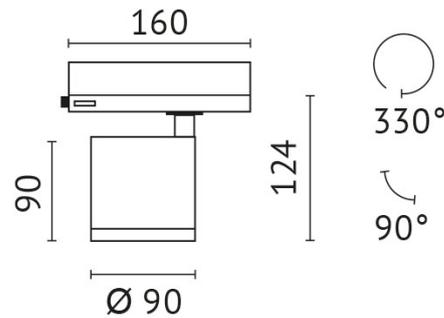

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3773 lm

colour temperature: 2700 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 119 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32SW11S

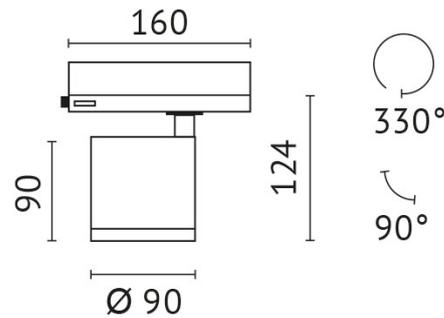

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3817 lm

colour temperature: 2700 K

colour rendering index: >90

beam angle: 15°

pivotable: 90°

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 121 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32SW12-60

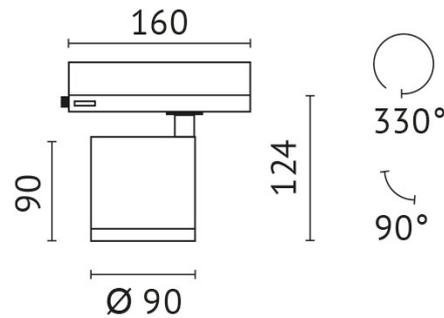

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3719 lm

colour temperature: 2700 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 118 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32SW12F

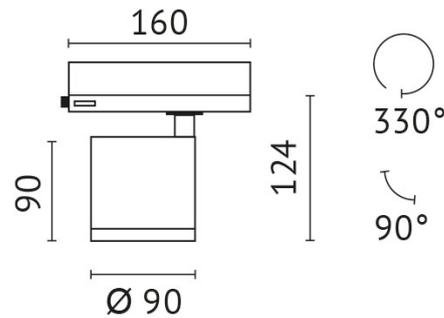

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3773 lm

colour temperature: 2700 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 119 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32SW12S

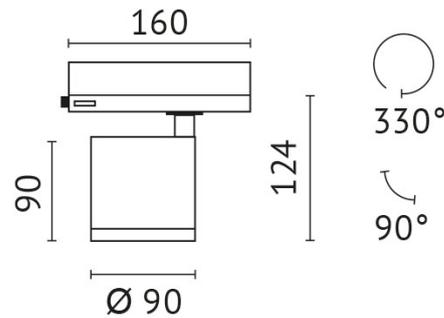

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3817 lm

colour temperature: 2700 K

colour rendering index: >90

beam angle: 15 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 121 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32WNW11-60

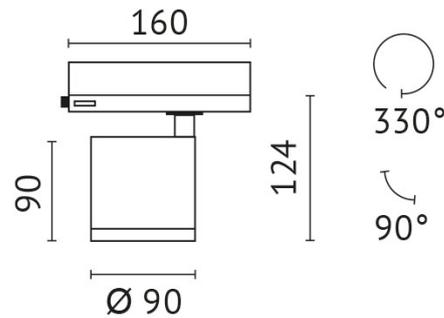

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3888 lm

colour temperature: 3500 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 123 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32WNW11F

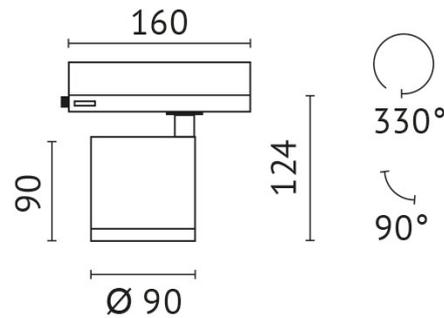

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3933 lm

colour temperature: 3500 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 124 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32WNW11S

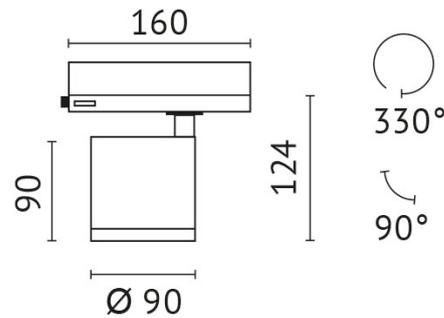

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3888 lm

colour temperature: 3500 K

colour rendering index: >90

beam angle: 15°

pivotable: 90°

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 123 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32WNW12-60

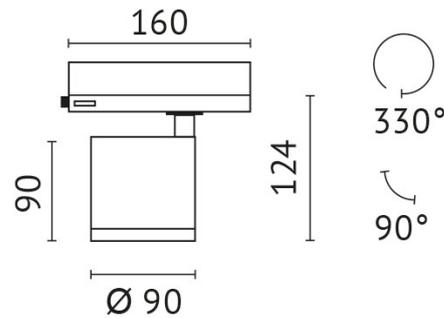

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3933 lm

colour temperature: 3500 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 124 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32WNW12F

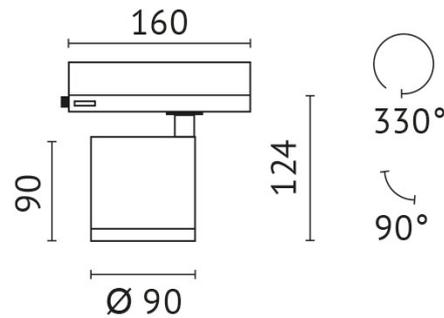

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3888 lm

colour temperature: 3500 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 123 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32WNW12S

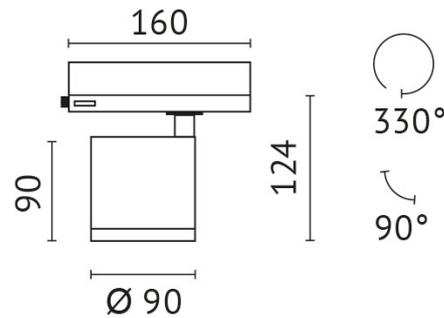

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3933 lm

colour temperature: 3500 K

colour rendering index: >90

beam angle: 15 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 124 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32WW11-60

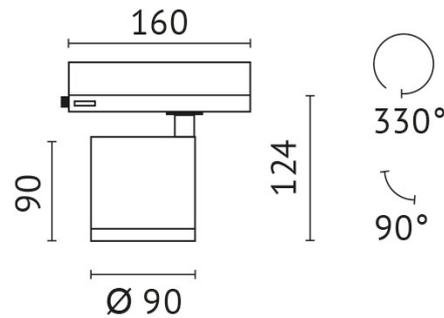

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3850 lm

colour temperature: 3000 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 122 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32WW11F

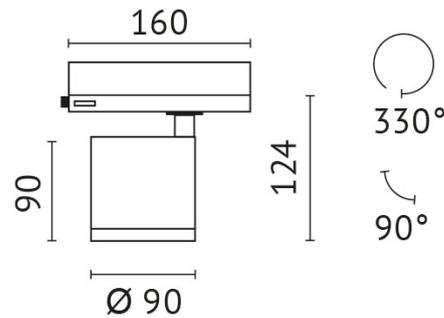

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3894 lm

colour temperature: 3000 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 123 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32WW11S

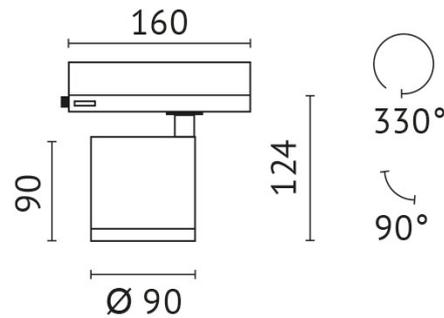

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3850 lm

colour temperature: 3000 K

colour rendering index: >90

beam angle: 15 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 122 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32WW12-60

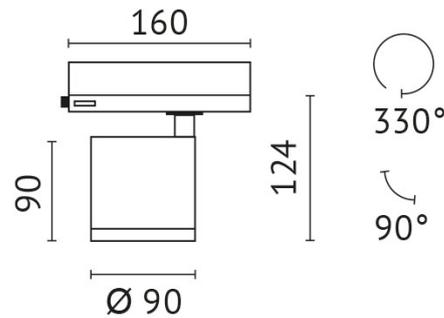

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3894 lm

colour temperature: 3000 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 123 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32WW12F

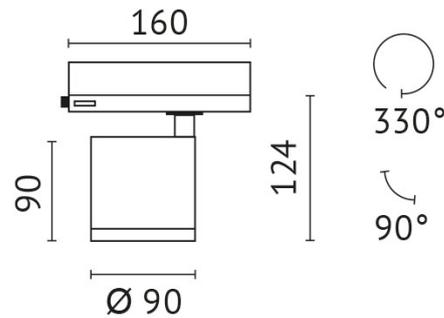

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3850 lm

colour temperature: 3000 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 122 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32WW12S

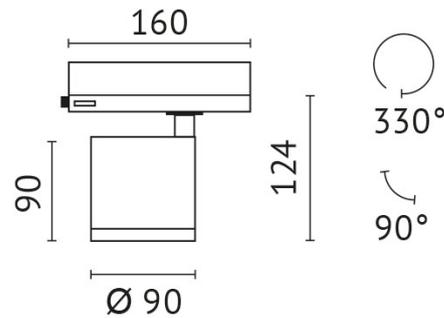

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3894 lm

colour temperature: 3000 K

colour rendering index: >90

beam angle: 15 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 123 lm/W

protection class: 2

outside diameter: 95 mm


colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32NW11-60

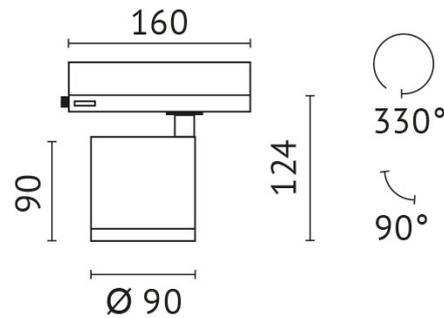

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3871 lm

colour temperature: 4000 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 123 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32NW11F

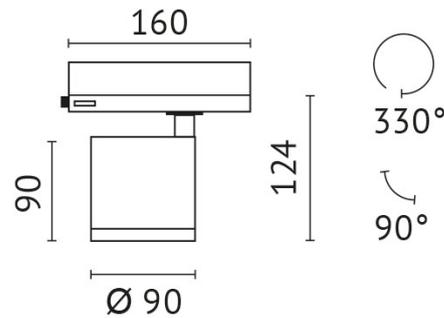

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3928 lm

colour temperature: 4000 K

colour rendering index: >90

beam angle: 40 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 124 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32NW11S

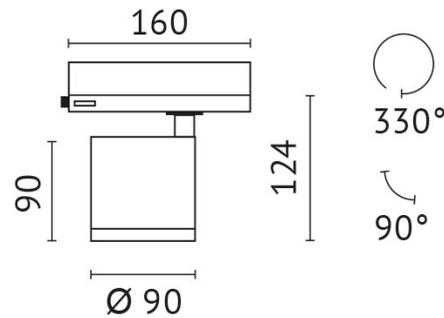

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3973 lm

colour temperature: 4000 K

colour rendering index: >90

beam angle: 15 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 126 lm/W

protection class: 2

outside diameter: 95 mm


colour: white

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt

MIN-32NW12-60

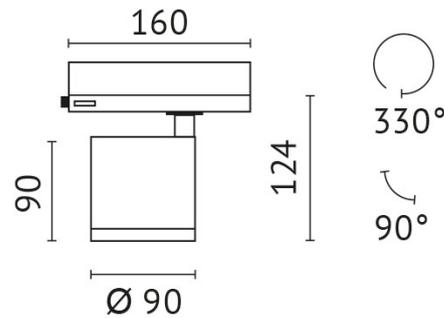

quantity lamps: 1

Light up with: COB LED

System power: 32 W

Luminous flux: 3871 lm

colour temperature: 4000 K

colour rendering index: >90

beam angle: 60 °

pivotable: 90 °

Power supply: with power supply

connection voltage: 220-240 V

system efficiency: 123 lm/W

protection class: 2

outside diameter: 95 mm

colour: black

material: die-cast aluminum

protection type: IP20

Adresse/Kontakt