

### FEATURES

- High LED efficacy of 110lm/W
- ENEC approved 2 channel Dali DT8 driver
- LED module can be programmed in other CCT (2700-6500K)
- Dimmable to 0,1%



LV-TW 60°

LV-TW 80°

### SPRINGS

Standard with CS spring (concrete/gyproc). Also available as above with WS spring (gyproc/metal).

### COLOURS

Available colours:



Nr	Housing	Inside ring
	RAL 9016	
XX=61	Matt white	Gold
XX=62	Matt white	Black
XX=65	Matt white	White



Nr	Housing	Inside ring
	RAL 9005	
XX=71	Matt black	Gold
XX=72	Matt black	Black
XX=76	Matt black	White

## Fido 98 LV-TW


Fixed

### SPECIFICATIONS

Beam angle (FWHM)	60° / 80°
Fixture material	Housing: Die cast aluminium / Reflector glass: Polycarbonate
Environment	Indoor
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C <sup>1</sup>
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years * (within the European Union and the countries of the Free Trade Association for products delivered after 1 May 2015)
Safety class	II
Energy class	These products contains a light source of energy efficiency class F (2700-6500K)

This luminaire contains built-in LED lamps. There are no exchangeable parts inside the luminaire. EU 874/2012

<sup>1</sup> In applications with a flat roof (f.i. car showrooms) the temperatures may exceed 45°C. Please ask our sales office for a special driver.




Only when the product is installed in a closed ceiling it may be exposed to water splashes, and only on its front side.

IP20

IP44

## FIDO 98 LV-TW 2700-6500K

Downlight incl. PSU

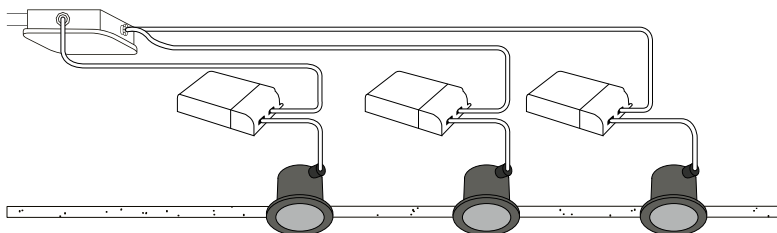

### ITEM SPECIFICATIONS (PART A)

Description	Item code CS	Item code WS	Extra	Input	W	Lm	Lm/W	CRI (typ.)
Fido 98 LV-TW 2700-6500K 1250Lm 60° Dali	F16A03XX4W02	F16A03XX9W02	incl. PSU	220-240V	11,4	1250	110	95/86
Fido 98 LV-TW 2700-6500K 1250Lm 60° Casambi	F16A03XX4X02	F16A03XX9X02	incl. PSU	220-240V	11,4	1250	110	95/86
Fido 98 LV-TW 2700-6500K 1250Lm 80° Dali	F16A03XX4Y02	F16A03XX9Y02	incl. PSU	220-240V	11,4	1250	110	95/86
Fido 98 LV-TW 2700-6500K 1250Lm 80° Casambi	F16A03XX4Z02	F16A03XX9Z02	incl. PSU	220-240V	11,4	1250	110	95/86

### ITEM SPECIFICATIONS (PART B)


Description	R9	Rf	Rg	R15	UGR	Pf	Ripple	Inrush	B16A
Fido 98 LV-TW 2700-6500K 1250Lm 60° Dali	96	95	103	100	21.9	0.90	<5%	200mA <sup>2</sup> s	106 pcs
Fido 98 LV-TW 2700-6500K 1250Lm 60° Casambi	96	95	103	100	21.9	0.90	<5%	200mA <sup>2</sup> s	106 pcs
Fido 98 LV-TW 2700-6500K 1250Lm 80° Dali	96	95	103	100	26.4	0.90	<5%	200mA <sup>2</sup> s	106 pcs
Fido 98 LV-TW 2700-6500K 1250Lm 80° Casambi	96	95	103	100	26.4	0.90	<5%	200mA <sup>2</sup> s	106 pcs

### ITEM SPECIFICATIONS (PART C)

Description	Safety class	Energy class	Weight	Dimensions single carton	Quantity per carton	Expected lifespan (25°C)		
						L70B50	L80B50	L90B50
Fido 98 LV-TW 2700-6500K 1250Lm 60° Dali	II	F	377 gr	160x107x100 mm	18 pcs	>70.000 hrs	>70.000 hrs	>37.000 hrs
Fido 98 LV-TW 2700-6500K 1250Lm 60° Casambi	II	F	377 gr	160x107x100 mm	18 pcs	>70.000 hrs	>70.000 hrs	>37.000 hrs
Fido 98 LV-TW 2700-6500K 1250Lm 80° Dali	II	F	377 gr	160x107x100 mm	18 pcs	>70.000 hrs	>70.000 hrs	>37.000 hrs
Fido 98 LV-TW 2700-6500K 1250Lm 80° Casambi	II	F	377 gr	160x107x100 mm	18 pcs	>70.000 hrs	>70.000 hrs	>37.000 hrs

All values are measured at 230V (+/- 7%)

### DIMENSIONS

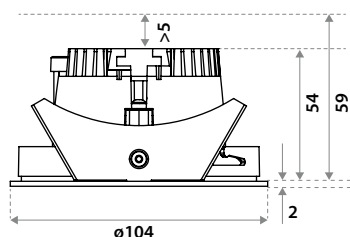

### HOLE SIZE



Using CS springs: Ø 98 mm.  
Thickness ceiling 5-59 mm  
& recess depth 59 mm.



Using WS springs. Ø 98 mm.  
Thickness ceiling 1-50 mm  
& recess depth 59 mm.